




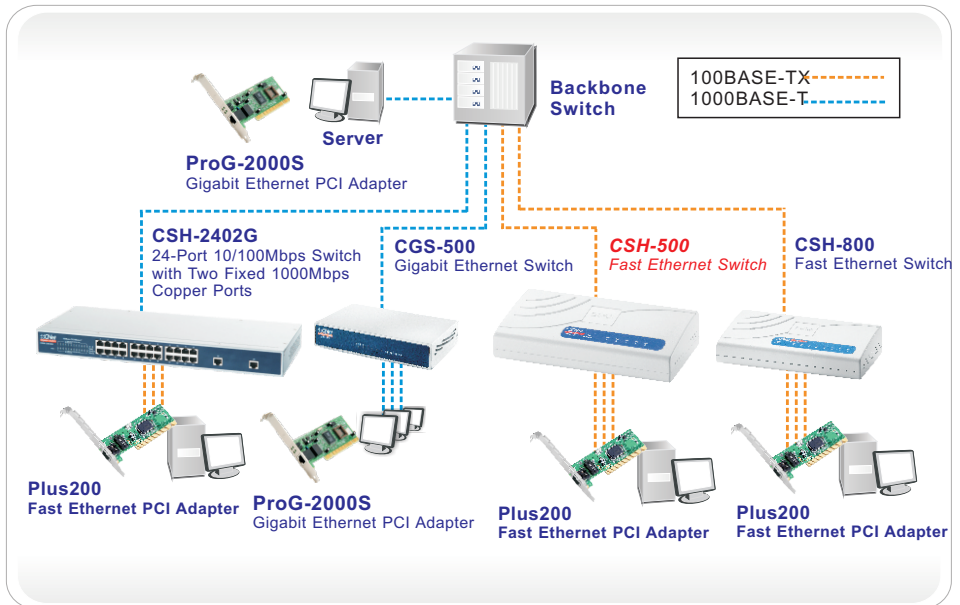
**Model No.:** CSH-500

-  **5 Ports with Auto-negotiation Function**
-  **Supports Auto-MDI/MDI-X to Detect and Correct Crossover Cables**
-  **Plug-&-Play with Easy-to-Read Diagnostic LEDs**



## 5-Port Fast Ethernet Switch

CNet's CSH-500 is a powerful Five (5) ports Fast Ethernet Switch. It comes with Five (5) 100/10Mbps ports. Every port is equipped with a built-In Auto-Negotiation function. Simply attach a network device to any port and the port will automatically set the port to operate at the fastest possible speed. This Switch is designed to provide lots of bandwidth with minimum hassle. They are 100% Plug-&-Play and require no configuration settings. These models fully comply with IEEE 802.3u and IEEE 802.3 standards for Fast Ethernet and Ethernet operation.



<b>Model No.:</b>	<b>CSH-500</b>
-------------------	----------------



## 5-Port Fast Ethernet Switch

### Features

- Supports Power Savings by Link-down Status and Cable Length.
- Full wire speed Store-and-Forward technology instantly eliminates bad packets.
- IEEE 802.3u and 802.3 standards compliant.
- IEEE 802.3x Flow-Control support for Full-Duplex operation.
- Back-Pressure support for Half-Duplex operation.

### Specifications

Model	CSH-500
Standards	<ul style="list-style-type: none"> <li>• IEEE 802.3: 10BASE-T</li> <li>• IEEE 802.3u: 100BASE-TX</li> </ul>
Ports	• Five ports 10BASE-T/100BASE-TX
Media Support	<ul style="list-style-type: none"> <li>• 10BASE-T: Category 3, 4 or 5 TP</li> <li>• 100BASE-TX: Category 5 TP</li> </ul>
Bandwidth	• 10BASE-T/100BASE-TX:10/20/100/200Mbps, via Auto-Negotiation
Forwarding/ Filtering Rate	<ul style="list-style-type: none"> <li>• 14881 packets/second per port @ 10Mbps, maximum</li> <li>• 148810 packets/second per port @ 100Mbps, maximum</li> </ul>
Duplex Modes	• All ports support Auto-negotiation and Auto-MDI/MDI-X functions
LED Indicators	<ul style="list-style-type: none"> <li>• One LED displays Power On/Off status</li> <li>• One LED per port displays Link/Activity status</li> </ul>
External Power Adapter	• Output 5VDC, 0.6Amp (Input according to country)
Power Consumption	• 2.35W maximum
Environment	<ul style="list-style-type: none"> <li>• Operating Temperature:0° ~45° C (32° ~ 113° F)</li> <li>• Storage Temperature: -20° ~70° C (-4° ~ 158° F)</li> <li>• Humidity: 10% ~ 90% Non-condensing</li> </ul>
Certifications	• FCC Class B, CE Mark and VCCI class B
Dimensions ( L x W x H )	• 150 x 80 x 30 mm (5.9 x 3.14 x 1.18 inches)

### Ordering Information

Model	Description
CSH-500	5-Port Fast Ethernet Switch