

Model No.: **CWR-915**




- ✔ *Low Cost & high performance for Wireless-G product replacement.*
- ✔ *Support WPS for easy wireless connection*
- ✔ *Support AP, AP client, Bridge, WDS*

### Wireless-N Router

Enjoy fast wireless connectivity for your home or home office with CNet's Wireless-N Router (CWR-915). CWR-915 delivers plenty speed and coverage so users can connect Internet, on-line game and share photo, music without wires.

CWR-915 also provides QoS engine that prioritizes time-sensitive online traffic, that enables smooth Internet phone (VoIP) and responsive gaming.

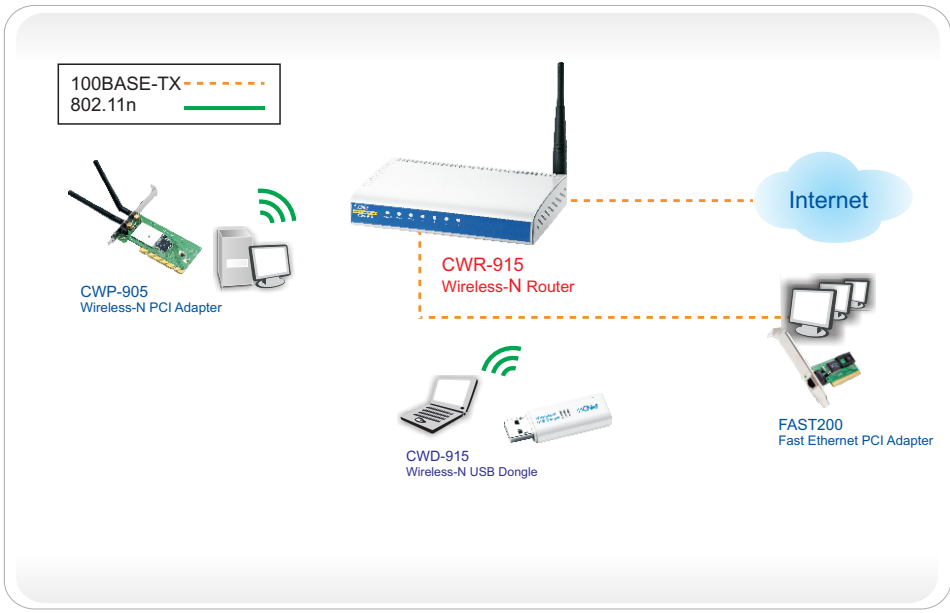

Model No.:	<b>CWR-915</b>
------------	----------------

## Wireless-N Router

### Features

- Complies IEEE 802.11b/g and IEEE 802.11n Draft 2.0
- Support 64/128-bit WEP, WPA, WPA2 security
- Support 802.1x MD5/PEAP RADIUS server authorization
- High speed data rate up to 150Mbps
- Support WMM, reserve bandwidth for multi-media
- Support auto negotiating rate adaptation



### Specifications

Model	CWR-915
Standards	<ul style="list-style-type: none"> <li>· IEEE 802.3u</li> <li>· IEEE 802.11g</li> <li>· IEEE 802.11b</li> <li>· IEEE 802.11n Draft 2.0</li> </ul>
Channels	<ul style="list-style-type: none"> <li>· 1-11 for FCC</li> <li>· 1-13 for ETSI</li> </ul>
Ethernet Port	<ul style="list-style-type: none"> <li>· WAN: One 10/100M (RJ-45) Port with auto MDI/MDI-X</li> <li>· LAN: Four 10/100M (RJ-45) Port with auto MDI/MDI-X</li> </ul>
Power Supply	· Input AC110V or AC230V · Output: DC12V/1A
LED Indicators	· Power · WLAN · WAN · LAN 1~4
Data Rate	<ul style="list-style-type: none"> <li>· 11b: 11/5.5/2/1Mbps</li> <li>· 11g: 54/48/36/24/18/12/9/6Mbps</li> <li>· 11n (20MHz): MCS0-7, up to 72Mbps</li> <li>· 11n (40MHz): MCS0-7, up to 150Mbps</li> </ul>
Modulation	<ul style="list-style-type: none"> <li>· 802.11b: CCK, DQPSK, DBPSK</li> <li>· 802.11g : OFDM</li> <li>· 802.11n : OFDM</li> </ul>
Antenna	· One 3dBi fixed antenna
Securities	<ul style="list-style-type: none"> <li>· WEP 64/128</li> <li>· WPA</li> <li>· WPA 2</li> <li>· IEEE 802.1x</li> </ul>
Transmit Power	<ul style="list-style-type: none"> <li>· 11b: 17 +/-1.5dBm @ Normal Temp Range, typical</li> <li>· 11g: 15 +/-1.5dBm @ Normal Temp Range, typical</li> <li>· 11n: 15 +/-1.5dBm @ Normal Temp Range, typical</li> </ul>
Receive Sensitivity	<ul style="list-style-type: none"> <li>· 11b: -90 +/-2dBm</li> <li>· 11g: -75 +/-2dBm</li> <li>· 11n: -69 +/-2dBm</li> </ul>
Environment	<ul style="list-style-type: none"> <li>· Operating Temperature: 0°~40°C (32°~104°F)</li> <li>· Storage Temperature: -20°~60°C (-4°~140°F)</li> <li>· Humidity: 10%~90% Non-condensing</li> </ul>
Certifications	· CE, FCC
Dimensions (L x W x H)	· 157 x 30 x 127mm ( 6.18 x 1.18 x 5 inches )

### Ordering Information

Model	Description
CWR-915	Wireless-N Router